


Intel® C236 1U Rackmount 8 LANs with 1 NIM Slot Network Appliance



Features

- 1U Rackmount Network Appliance
- Intel® LGA1151 6th/7th Generation Core™/Xeon Processors
- 288-pin ECC Dual Channel DDR4 2133 UDIMM x 4 Up to 64GB
- 10/100/1000Base-TX Ethernet Ports x 8 (Onboard RJ-45 x 6 & SFP x 2) with Max. 3 Pairs of LAN Bypass Function
- Internal 3.5" SATA HDD x 1 or 2.5" SATA HDD x 2 (Optional Extra 4 Pcs x 2.5" HDD without NIM and Expansion Lot Presented)
- CFast x 1 (Optional CF Socket or mSATA Slot)
- 8 bits GPIO (Default 4-bits Input, 4-bits Output)
- TPM Supported (Optional Request), RAID 0,1 Supported
- LCM with Keypad x 1, RJ-45 for Console x 1, USB 3.0 x 2
- 250W AC Type Power Input
- VGA Header x 1 (Optional VGA Cable)

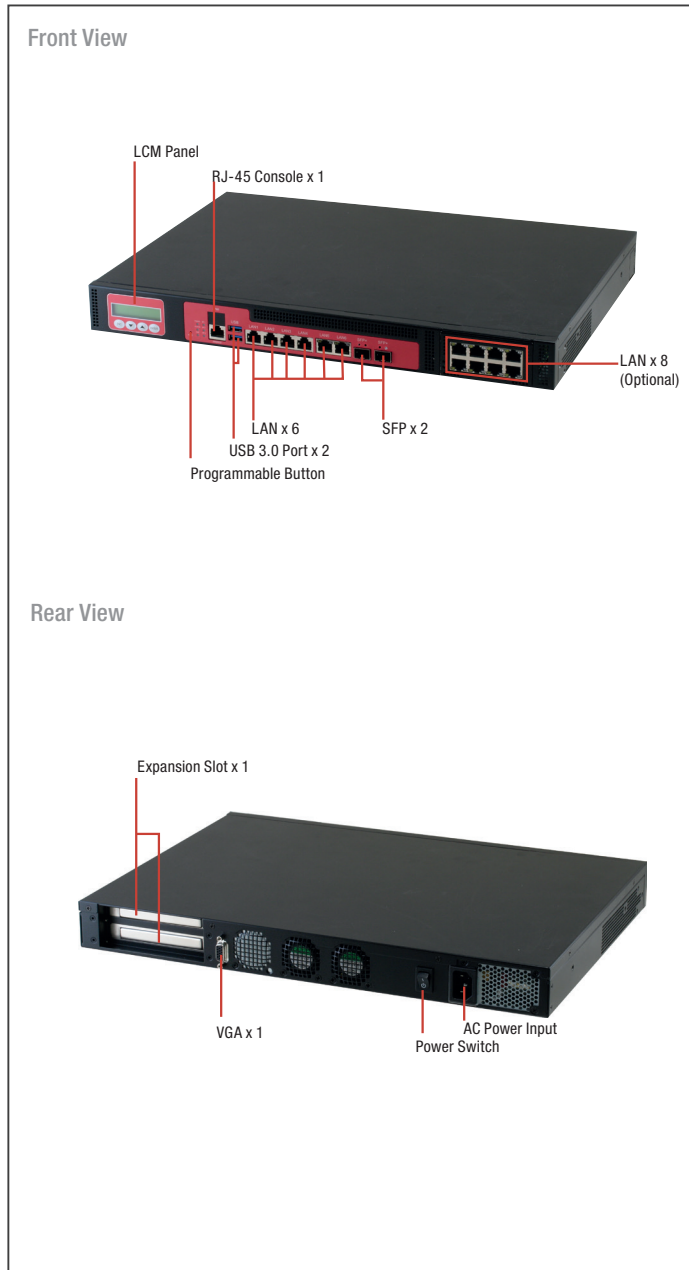


Storage	
HDDs	Internal 2.5" SATA HDD x 2 or 3.5" SATA HDD x 1 (optional)
CF/CFast/mSATA	Optional BOM CFast™ socket or mSATA slot or CF™ socket (optional)
Expansion/Internal Interface	
PCIe slot	Up to PCIe x 2 [x8] slots
Mini-PCIe slot	Mini Card x 1
Keyboard and Mouse	Pin-header
Universal Serial Bus	USB 3.0 x 2, Box Header (2.0mm)
Miscellaneous	
RTC	Internal RTC
Watchdog Timer	1~255 steps by software programmable, 1 sec per step
Software Button	GPIO Programmable push button x 1
TPM	TPM v1.2 9660 (TPM2.0 9665 optional)
GPIO	4 bits input, 4bits output
FAN	2
MTBF (Hours)	94,241
Color	Black
Environmental Parameters and Dimension	
Power Requirement	250W ATX PSU
Operation Temp.	32°F ~ 104°F (0°C ~ 40°C)
Storage Temp.	-4°F ~ 140°F (-20°C ~ 60°C)
Operating Humidity	10% ~ 80% relative humidity, non-condensing
Storage Humidity	10% ~ 80% @ 40°C, non-condensing
Vibration	0.5 Grms/ 5 ~ 500Hz/ operation (3.5" H.D.D) 1.5 Grms/ 5 ~ 500Hz/ no operation
Shock	10G peak acceleration (11 m sec. duration), operation 20G peak acceleration (11 m sec. duration), non-operation
Chassis Dimension (W x D x H)	16.93" x 12.01" x 1.73" (430mm x 305mm x 44mm)
I/O Interfaces	
Front Panel	- Power LED x 1 - Status LED x 1 - HDD Active LED x 1 - USB 3.0 Ports x 2 - RJ-45 Console x 1 - Parallel LCM display and 4 keypad x 1 (Optional w/ NIM slot) - Software Programmable Switch x 1 - Bypass LED X2 - RJ45 X8 or RJ45 X6+SFPX 2
Rear Panel	- AC Power Input x 1 - Power Switch x 1 - VGA port (Optional) - Rear Expansion Slot x 2 (2 x PCIe [x8] slots, NIM slot will be disabled if PCIe Riser supported)

Specifications

Platform	
Form Factor	1U Rackmount Network Platform
Processor	Intel® 6th/7th Generation Core™/ Xeon Processors
Chipset	Intel® C236
System Memory	DDR4 1600/1866/2133/2400 UDIMM/ECC Up to 64GB 288-pin DIMM x 4
Network	
Ethernet	Intel® i211 GbE x 6 + Intel® i210 GbE x 2 (SFP) + NIM x 1(Or i211 GbE x8 +NIMx1)UDIMM/ECC
Bypass	Onboard 2 pairs bypass, others depend on NIM module
NIM Slot	1
Display	
Graphic Controller	Intel® Integrated
Connector	VGA cable (Optional)

Dimension

Unit: mm

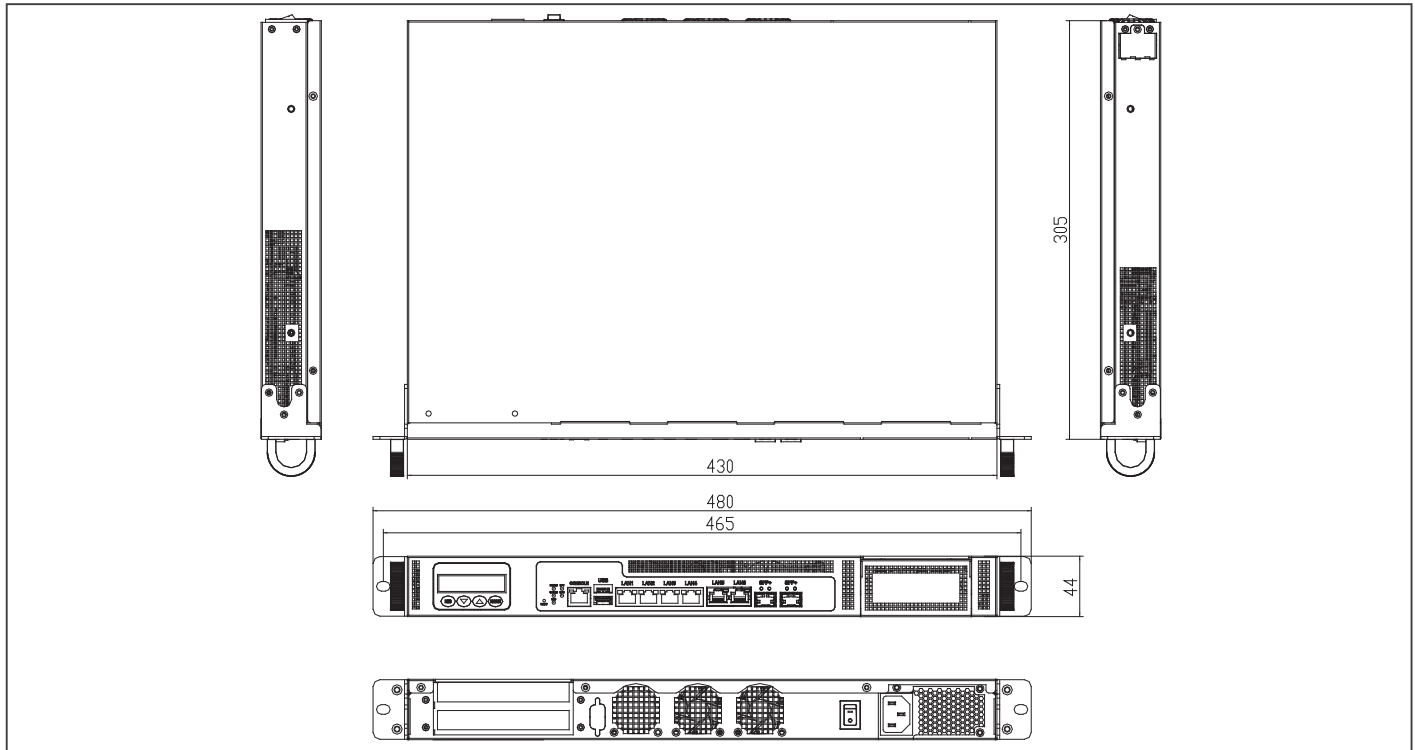

Ordering Information

Part Number	CPU	Memory	Storage	Display	LAN	USB	Console	Bypass	*NIM Slot	*Expansion Slot
FWS-7821W8-H25-A10-000	6th/7th Gen. Intel® Core™/Xeon	DDR4 ECC/UDIMM (Up to 64 GB)	2.5" HDD Bay x 2 + CFast™ Slot x 1	—	1 GbE x 6, 2 x 1G SFP	USB 3.0 x 2	RJ-45 x 1	2	Note 1	Note 2

* Please contact AAEON for other optional specifications.

Note 1: Need to configure riser card and module

Note 2: Need to configure riser card

Packing List

- Console Cable
- Ear Brackets
- FWS-7821

Optional Accessories

- **M02666600**
Slide x 2, for Rackmount Usage
- **1702031803**
Power Cord, 3P-250V/10A, 180D, 1.8M, VDE, YP22/YP12
- **1702031802**
Power Cord, 3P-250V/10A, 180D, 1.8M, USA, YP22/YP12
- **170203180E**
Power Cord, 3P-25V/7A, 180D, 1.8M, PSE, YP12/YP12
- **9761781027**
VGA Cable
- **9761782100**
(TF)2.5" x 2 HDD-LEFT Module, FWS-7821
- **PER-R40X**
NIM LAN Module Riser Card
- **PER-R44X**
2 Slot Rear PCIe Riser Card
- **PER-T354**
1 Slot Rear PCIe Riser Card
- **NIM-S26C-A10-T40-0002**
Intel® Fortville XL710 PCI-Express 10G SFP+ 4 Ports Module for FWS-7821
- **NIM-S26B-A10-F20-0002**
Intel® Fortville XL710 PCI-Express 40G QSFP 2 Ports Module for FWS-7821
- **NIM-S13B-A10-G80-0002**
Intel® 82580EB PCI-Express 1G SFP 8 Ports Module for FWS-7820
- **NIM-S13D-A10-G40-0002**
Intel® 82580EB PCI-Express 1G SFP 4 Ports Module for FWS-7820/7821
- **NIM-C13B-A10-G82-0001**
Intel® 82580EB PCI-Express 1G Copper Ethernet 8 Ports Module for FWS-7821 w/ 2Pair bypass
- **NIM-C13D-A10-G42-0002**
Intel® 82580EB PCI-Express 1G Copper Ethernet 4 Ports Module for FWS-7821 w/ 2Pair bypass
- **NIM-S13E-A10-G82-0002**
LAN Module, Intel® 82580EB, 8 x 1GbE SFP, 2 Bypass, FWS-7820/7821, Rev. A.1.0