


RT-660R-W480E


4U 17.5" Rackmount Chassis with 10th Generation Intel® Core™ Processor

Turn-Key Chassis Solutions

Front View

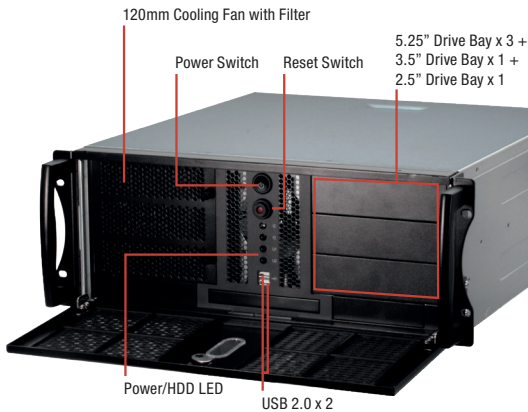

Rear View

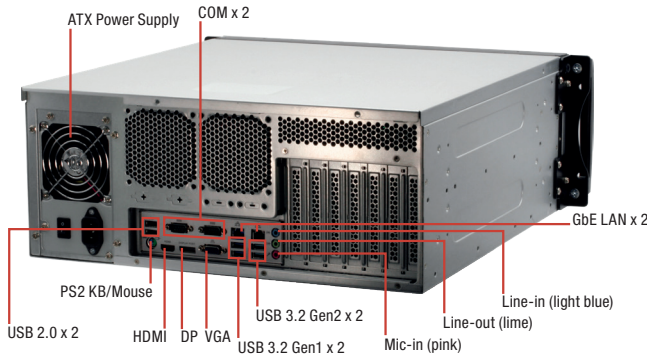

Specifications

| System | |
|-------------------|---|
| CPU | Intel® 10th Gen (Cometlake-S) Core™ Processors, up to 125 W |
| Chipset | Intel® W480E Express Chipset |
| System Memory | Dual Channel DDR4 2933 / 2666 / 2400 MHz, (ECC memory supported by CPU) - Intel Core i9 / i7 CPUs support DDR4 up to 2933 MHz - Intel Core i5 / i3 CPUs support DDR4 up to 2666 MHz - Intel Pentium / Celeron CPU support DDR4 up to 2400 MHz |
| I/O Chipset | F81966D-I |
| Display Interface | HDMI 2.0a x 1, VGA x 1, DP 1.2 x 1, HDMI 2.0a, Max resolution up to 4096 x 2160@60Hz, DisplayPort 1.2, DP++ Max resolution up to 4096 x 2160@60Hz, VGA Max resolution up to 1920 x 1200@60Hz |
| Storage | SATA III (6.0Gb/s) ports x 6, support RAID 0/1/5/10 M.2 x 1 (Key M, 2242 / 2260 / 2280) with SATA3 and PCIe x4 for SSD * Shared with SATA3_5 / SATA3_6 Ports - When using M.2 PCIe x4 SSD, both SATA3_5 and SATA_6 Ports are disabled - When using M.2 SATA SSD, only SATA3_5 Port is disabled, and SATA3_6 Port is available |
| Storage Devices | External 5.25" x 3, Internal 3.5" x 4 + 2.5" x 1 |
| Audio | Realtek ALC887/ALC897 HD, High Definition Audio. Line-In / Line-Out / Mic-In |

Features


- Industrial computer/workstation for automation and AI edge Computing
- Intel® Xeon® W-1200 series & Intel® 10th Gen (Comet lake-S) Core™ Processors with W480E chipset
- 4 x 288-pin Long-DIMM, Support Dual Channel DDR4 2933 (i9 / i7 CPU) / 2666 (i5 / i3 CPU) / 2400 (Pentium / Celeron CPU), up to 128GB
- Support ECC Long DIMM memory modules
- 1 x PCIe x16 Gen3, 1 x PCIe x8 Gen3, 3 x PCIe x4 Gen3, 2 x PCI
- 4 x USB 3.2 Gen2, 4 x USB 3.2 Gen1, 4 x USB 2.0
- 1 x M.2 Key E, 1 x M.2 Key M, 1 x M.2 Key B, 6 x COM, 6 x SATA3
- 1 x Intel 1 Gigabit LAN, 1 x Intel 2.5 Gigabit LAN
- Support Triple display, 1 x DP 1.2, 1 x VGA, 1 x HDMI 2.0a
- TPM 2.0 onboard
- Supports Intel® vPro, AMT, RAID 0/1/5/10



| | |
|-------------------------|---|
| Ethernet | LAN1: Intel® I225LM with 10/100/1000/2500 Mbps LAN2: Intel® I219LM with 10/100/1000 Mbps, support AMT / vPro |
| TPM | TPM 2.0 onboard |
| H/W Monitor | Temperature Monitor on CPU/Chassis, Voltage Monitor on Vcore/5V/3.3V/12V, Fan Monitor on CPU/Chassis |
| Watchdog Timer | 1~255 steps by software program |
| Smart Fan control | CPU Fan x 1, Chassis Fan x 2 |
| Wake On LAN/ PXE | Yes (WOL / PXE) |
| Power State | S3, S4, S5 |
| System Fan | 1 x 120mm (T=25mm), PWM mode. |
| I/O | |
| Front Panel | 1 x Power On/Off, 1 x System Reset |
| Rear Panel I/O | USB 3.2 Gen2 x 4, USB 2.0 x 2, PS/2 Keyboard/Mouse port, HDMI x 1, VGA x 1, DP x 1, COM x 2 (RS232/422/485), Audio Jack x 3: Line-in, Mic-in, Line-out, LAN (RJ45) ports x 2 |
| Internal I/O connectors | SATA III (6.0Gb/s) ports x 6, support RAID 0/1/5/10, M.2 x 1 (Key M, 2242 / 2260 / 2280) with SATA3 and PCIe x4 for SSD, USB 3.2 Gen1 x 4 (2 x USB 3.2 Gen1 header), USB 2.0 x 2(1 x 2.54 pitch header), RS-232 headers x 4, 8 x GPI, 8 x GPO (shared with LPT header), CPU Fan connector(s) (4-pin) x 1, Chassis Fan connector(s) (4-pin) x 3, Chassis Intrusion x 1, AT/ATX mode select jumper x 1, Front panel header x 1, Clear CMOS jumper x 1, 1 x Power On/Off, 1 x System Reset |
| Expansion | PCIe Gen3 Slots x 3 (PCIe1 / PCIe2 / PCIe3: Single at x16 (PCIe1); Dual at x8 (PCIe1) / x8 (PCIe3); Triple at x8 (PCIe1) / x4 (PCIe2) / x4 (PCIe3)) PCIe x4 (Gen3) x 2 PCI x 2 M.2 x 1 (Key E, 2230) with PCIe x1, USB 2.0 and CNVi for Wireless M.2 x 1(Key B, 3042 / 3052) with PCIe x1 / USB 3.0 / USB 2.0 and SIM socket for 4G / 5G SIM socket x 1 connected to M.2 Key B |
| Power | |
| Battery | — |
| Power Requirement | ATX power supply Input: 90~264V Output: 500W. |
| Mechanical | |
| Color | Silver |
| Dimensions (W X H X D) | 445 x 430 x 176 (mm), 17.5" x 16.9" x 6.9" |
| Gross Weight | TBC |
| Net Weight | TBC |
| Environmental | |
| Operating Temperature | 32°F ~ 113°F (0°C ~ 45°C) |
| Storage Temperature | -49°F ~ 176°F (-45°C ~ 80°C) |
| Storage Humidity | 0~90%, non-condensing |

Dimension

Unit: mm

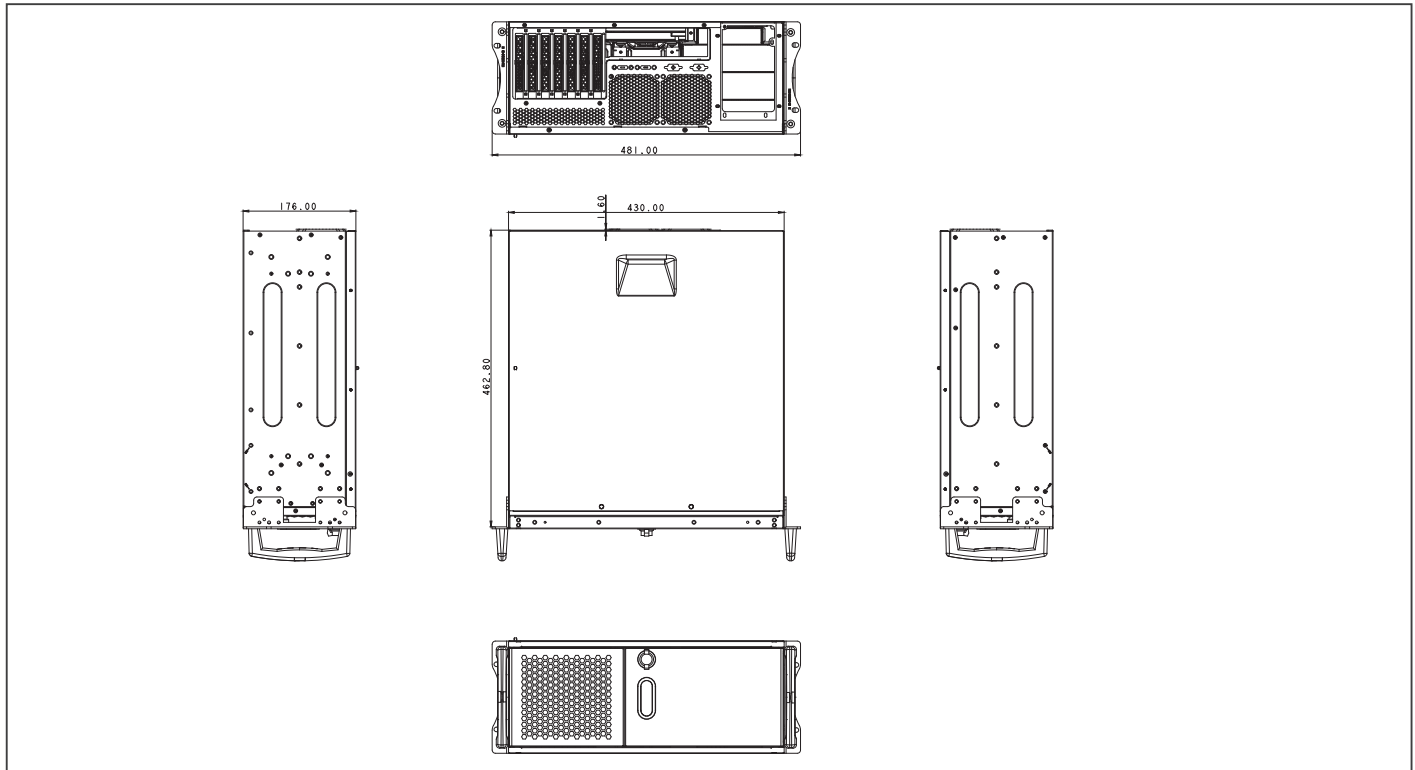

Packing List

- Accessory Box (Cable And Screw Bag)
- RT-660R-W480E

Ordering Information

- RT-660R-W480E-A10-0001
4U 17.5"Rackmount IPC with W480E. 500W ATX power supply, Silver color

Optional Accessories

- 1709100330
USB 2.0 cable (9P, 330MM, p=2.54mm, w/bracket)
- 14001-00400100
COM Port Cable (9P, 260mm, p=2.54mm w/bracket)
- 175921156B
CPU Cooler (2-Ball, Push-pin Type)
- 1759200172
CPU Cooler (2-Ball, Screw with Retention Plate)
- AP-FNTH1Q370010
CPU Cooler (2-Ball Bearing, 2U, TDP Max. 100W)
- 1702031802
Power Cord (US & Taiwan Type)
- 1702031803
Power Cord (European Type)
- 170203180E
Power Cord (Japanese Type)
- AP-FW9789182100
(TF)3.5" to 2.5" HDD bracket.Tragant.DeLock 18210
- AP-OT9789343000
5.25" converter bracket, supports 1x 3.5" hard drive and 2 x 2.5" hard drive